



APPROVED	C.G. FIG. 2A	
BY	CLASS	SUBCLASS
DRAFTSMAN	709	223

FIG. 1

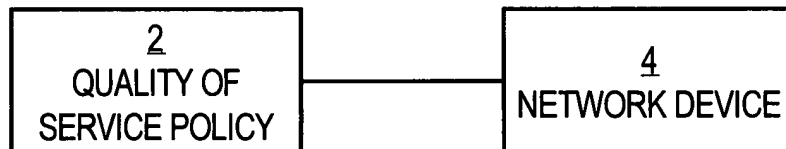


0914365-071200

FIG. 2A

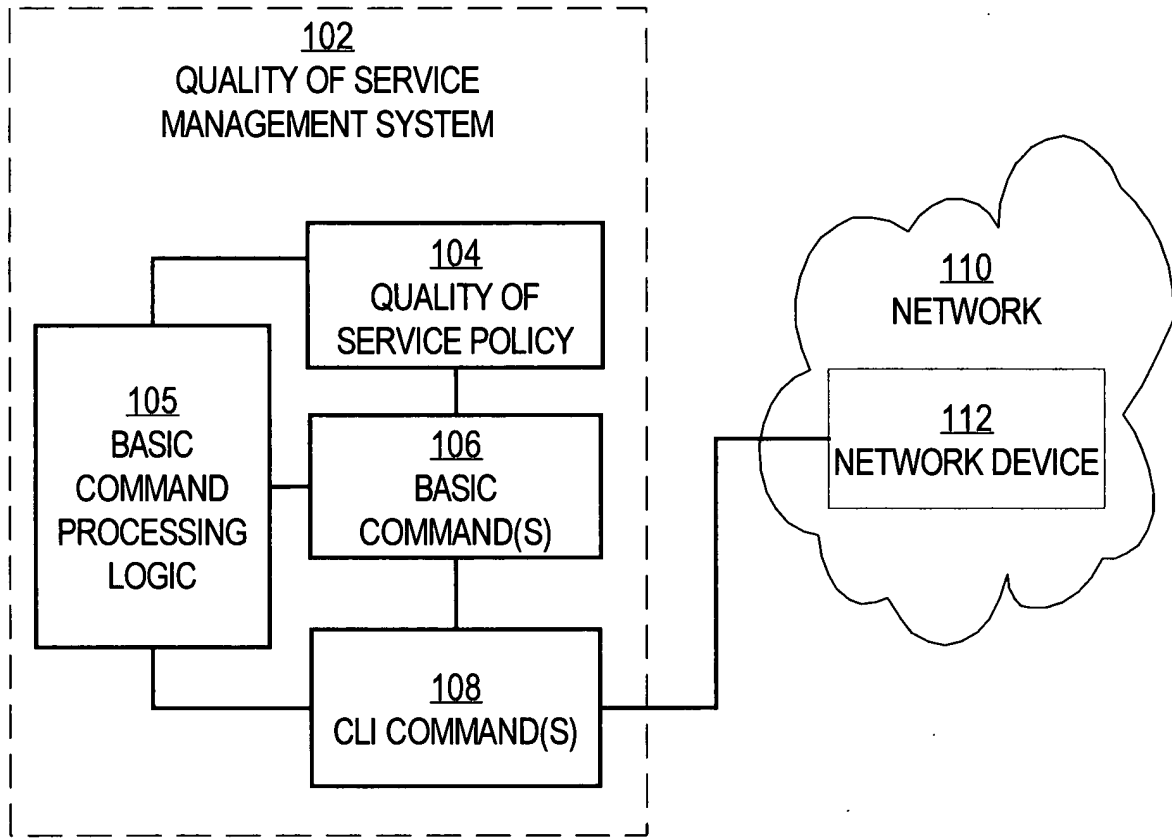


002720" 59E4960

FIG. 2B

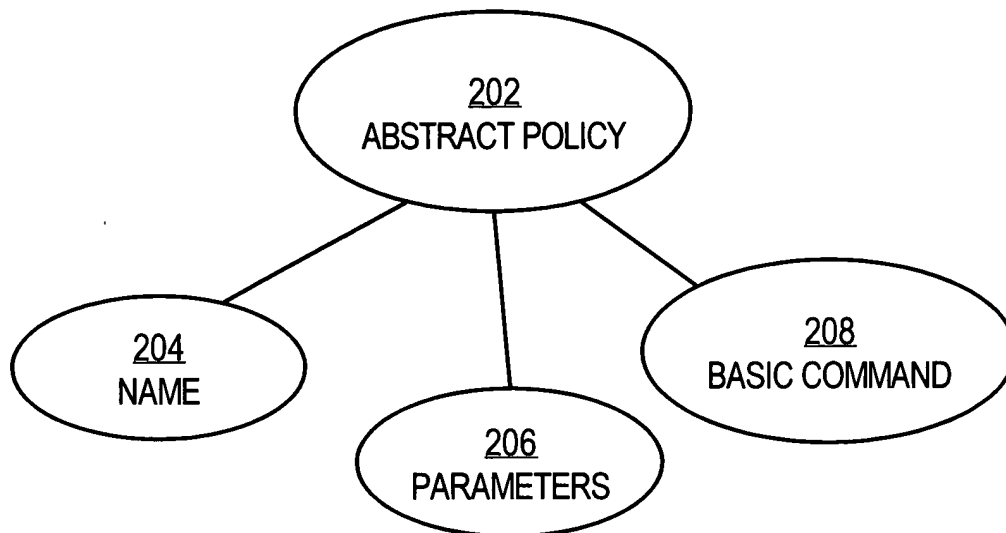

002720" 59E4960


FIG. 2C

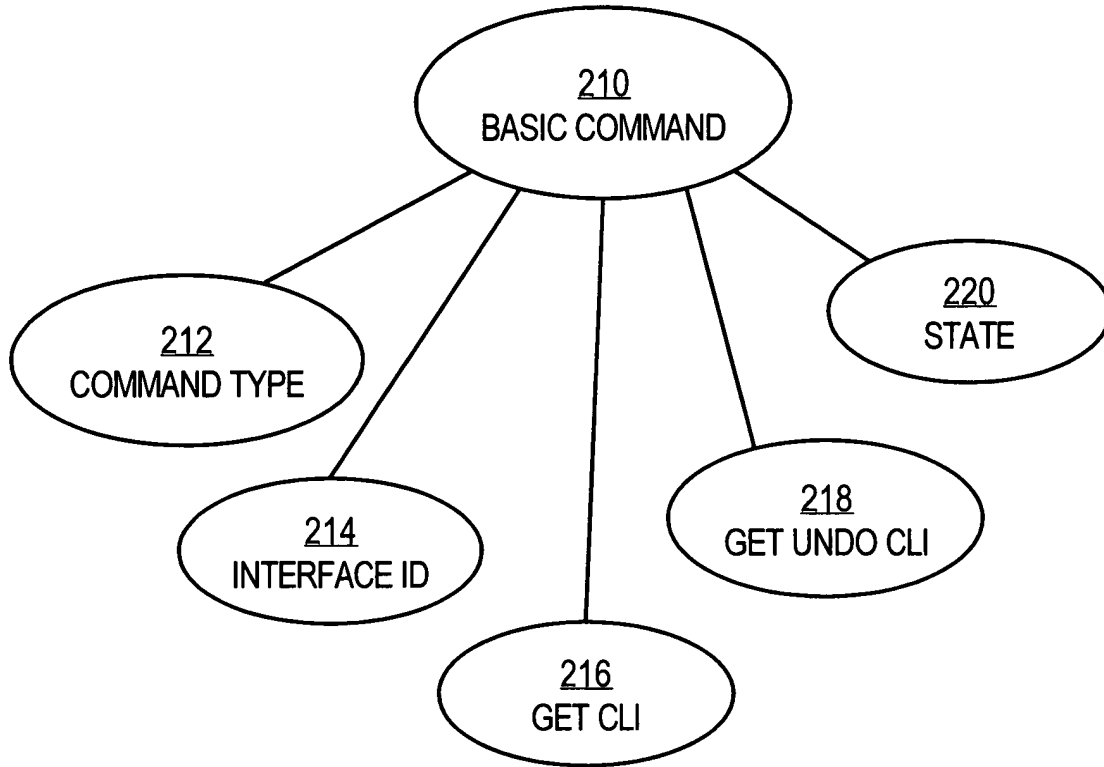

00214365-071200


APPROVED	C.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

FIG. 3A

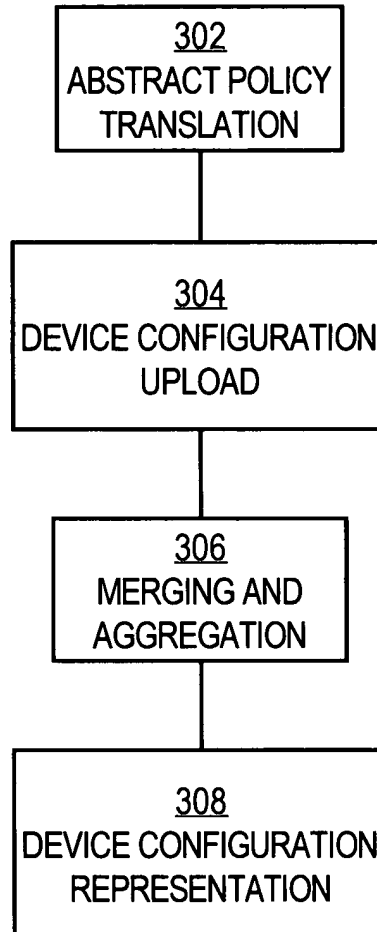


002F20"59E4960

FIG. 3B

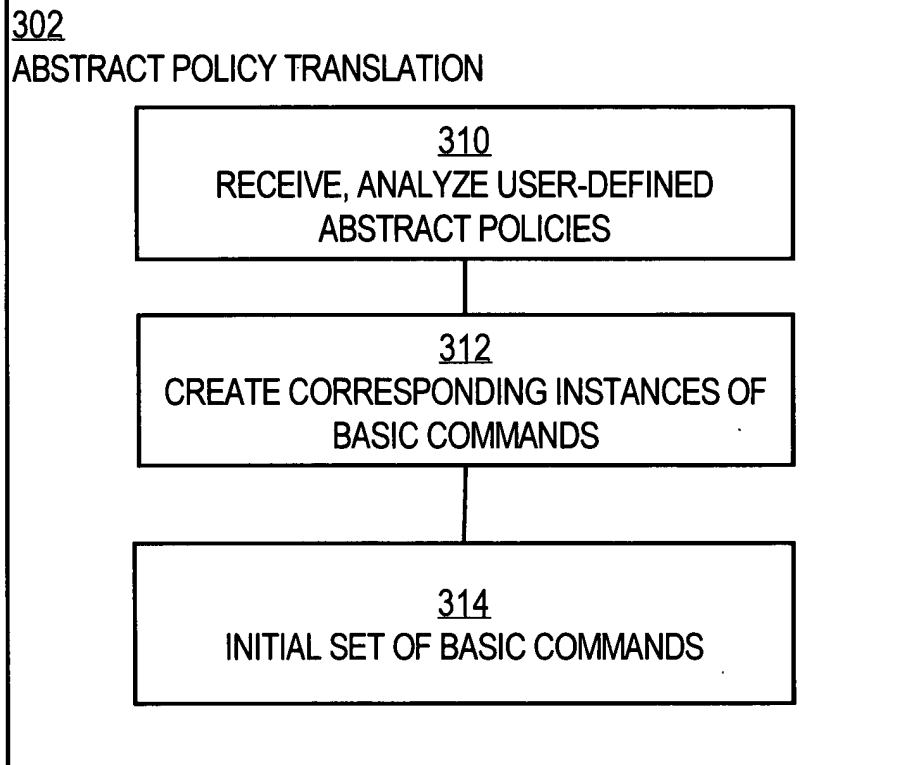


00614365-01200
002120" 5954T960

FIG. 3C

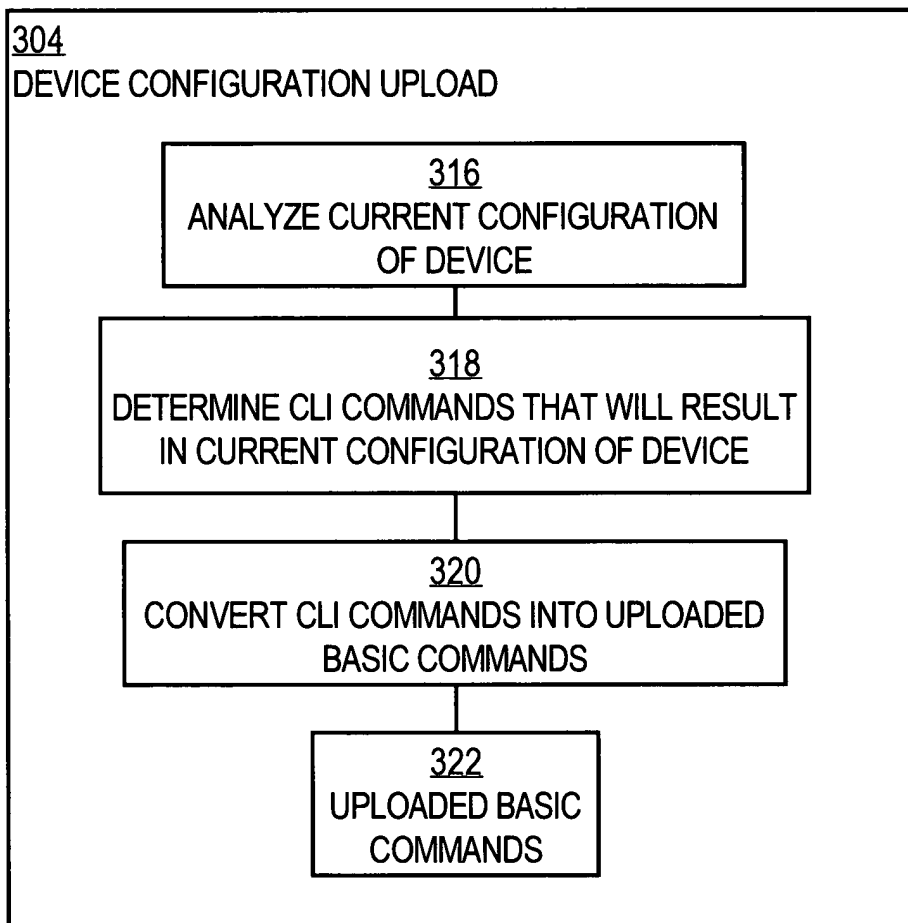

002720" 594950

FIG. 3D

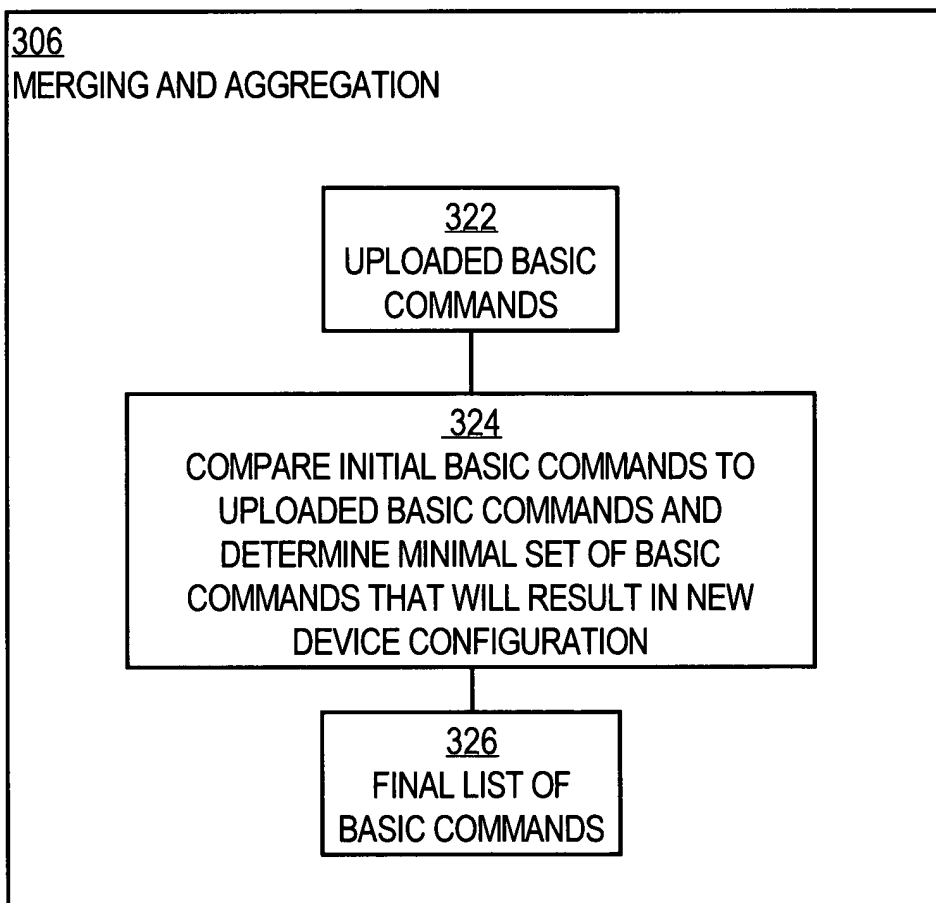

002720" 59E4T960

FIG. 3E

308

DEVICE CONFIGURATION REPRESENTATION

322
FINAL LIST OF
BASIC COMMANDS

324
TRANSLATE EACH BASIC COMMAND
IN FINAL LIST INTO CLI COMMAND(S)
BASED ON STATE VALUE

326
DEPLOY CLI COMMANDS TO DEVICE

05614365-071200

002720-59E4T560

FIG. 4

